



RRT-6UVME-SATA-DVD-R 6U VME SATA DVD with Removable Drive Module


THE 6U VME SATA DVD WITH REMOVABLE DRIVE MODULE adds a removable HDD or SSD and a DVD to a VME system using one VME slot. The drive and DVD each have separate SATA interfaces.

The drive module can easily be removed from the VME system without removing the VME board. The connectors between the drive module and carrier are rated for 100,000 mating cycles to support frequent insertions/removals.

The drive module can use any COTS 2.5" SATA Hard Disk Drive (HDD) or Solid State Drive (SSD) providing capacities up to 16 TB and sustained transfer rates up to 200 MB/S. Options for discrete, controlled secure erase.

The DVD is a standard slim DVD tray loading version. Modes of operation: DVD-ROM, DVD-R/W, CD-ROM, CD-R/W.

- Capacities up to 16 TB
- 200 MB/s transfer rates
- Uses off-the-shelf DVD/CD utility software
- SATA2 interface via VME P0 and/or P2
- Removable drive module
- 100,000 mating cycles
- Boot and/or storage disk
- COTS SATA HDDs/SSDs
- Military erase options
- FIPS 140-2, FIPS 197, TCG Opal options
- P2 SATA adapters available
- Compatible with all CPUs with a SATA controller
- ROHS Compliant

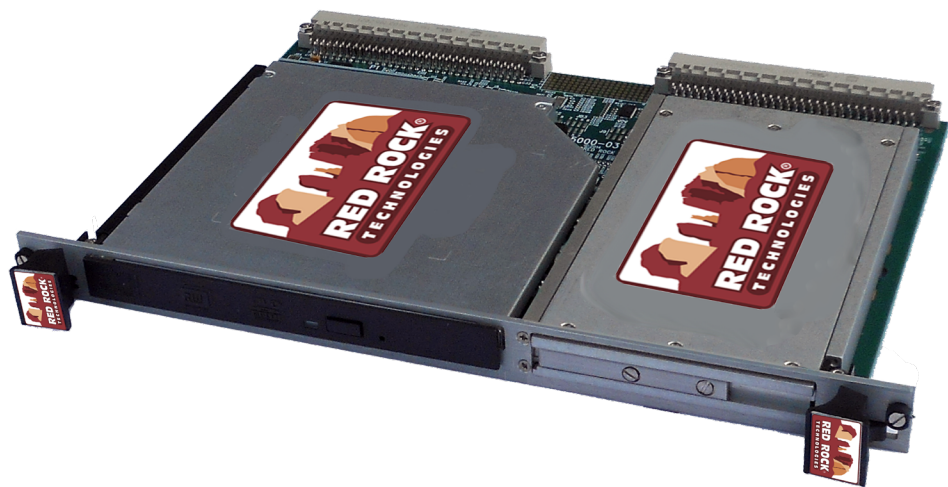

Parhelia B.V.
www.parheliabv.com
☎ +31(0)10 741 00 28

Ordering Information

Carrier

RRT-6UVME-SATA-DVD-R-P2-UR

Options May be left blank

Conformal Coating

UR	Polyurethane
AR	Acrylic

ORDER EXAMPLES

RRT-6UVME-SATA-DVD-R-P0
RRT-6UVME-SATA-DVD-R-P2-UR

Drive Module

RRT-DM-SATA-MLC - 1TB - UR - X - SE1

Requirements

Disk Type

HDD	Hard Disk Drive
SLC	Single Level Cell NAND FLASH SSD
MLC	Multi Level Cell NAND FLASH SSD
TLC	3D NAND FLASH SSD

Capacity

1TB - 5TB	For HDD
7GB - 240GB	For SLC
60GB - 16TB	For MLC
120GB - 8TB	For TLC

Options May be left blank

Conformal Coat

UR	Polyurethane
AR	Acrylic

Extended Temperature Range

X	-40°C to 85°C
---	---------------

Erase Types

FE	Fast Erase
SE1	NSA/CSS Manual 9-12 Erase
SE2	RCC-TG IRIG 106-07 Chapter 10 Erase
OPAL	TCG OPAL Compliant SSD
FIPS140-2	FIPS 140-2 Compliant SSD
FIPS197	FIPS 197 Compliant SSD

ORDER EXAMPLES

RRT-DM-SATA-SLC-240GB
RRT-DM-SATA-MLC-16TB-SE1-UR-X
RRT-DM-SATA-HDD-1TB-FIPS140-2

Product Specifications

6U VME SATA DVD WITH REMOVABLE DRIVE MODULE

PERFORMANCE

VERSION	HDD	SSD - TLC	SSD - SLC	SSD - MLC
CAPACITIES ¹	Up to 5TB	Up to 8TB	Up to 240GB	Up to 16TB
INTERFACE ²	SATA2, or SATA1			
THROUGHPUT - SUSTAINED	110MB/S	200MB/S		
SECTOR SIZE	512 bytes			

RELIABILITY

MTBF - DRIVE	500,000 hours	1 million hours	3 million hours	1 million hours
MTBF - DVD DRIVE	60,000 hours			
MTBF - DRIVE MODULE	3 million hours			
MTBF - CARRIER	3 million hours			
CARRIER/DRIVE MODULE MATING CYCLES	100,000 mating cycles			

POWER

VOLTAGE	+5V +/- 5%
WATTS (IDLE)	1W
WATTS (ACTIVE)	5W

ENVIRONMENTAL

OPERATING TEMP.	5 °C to 45 °C
STORAGE TEMP.	-20 °C to 65 °C
ALTITUDE	10,000 ft. (3,000 meters)
RELATIVE HUMIDITY	8% to 80%
SHOCK (OPERATING)	5G, 11mS; half sine
SHOCK (NON-OPERATING)	20G, 11mS; half sine
VIBRATION (OPERATING)	0.3G horizontal mounted, 0.2G vertically mounted, 5Hz to 500Hz, sine sweep rate of 1.0 oct/min
VIBRATION (NON-OPERATING)	2G 5Hz to 500Hz and sweep rate of 1.0 oct/min

PHYSICAL

FORM FACTOR	6U VME
WEIGHT	24 oz. max (681g)
PITCH	1.0"

NOTES

- (1) Smaller capacities available, larger capacities available as new COTS 2.5" drives released.
- (2) Interface connected via P0 or P2.
- (3) Environmental specifications based on DVD drive limitations.



Red Rock Technologies, Inc. reserves the right to modify, change or discontinue specific products within its product line at its own discretion. Red Rock Technologies, Inc. does not assume any liability resulting from the application or use of its products. The information contained herein has been checked and is believed to be entirely accurate; however, no responsibility is assumed for inaccuracies. "Red Rock Technologies" and the mountain logo are registered trademarks of Red Rock Technologies, Inc.

© Copyright 2023 Red Rock Technologies, Inc.
All rights reserved. (Rev. 20230112a)



Parhelia B.V.
www.parheliabv.com
+31(0)10 741 00 28